

## Standard P70

### Pleated Blind




#### Product information

Verosol's Standard Pleated Blind combines the soft appeal of a curtain with the versatility and simplicity of a blind. The ideal solution for heat and light control, the blind almost disappears when raised.


Simple and elegant, with a small stack height and short projection, giving you an uninterrupted view from your home or office window. In addition to the standard, pleated blinds are available in an array of different shapes and configurations in order to accommodate even the most obscure window.




#### System Diagrams

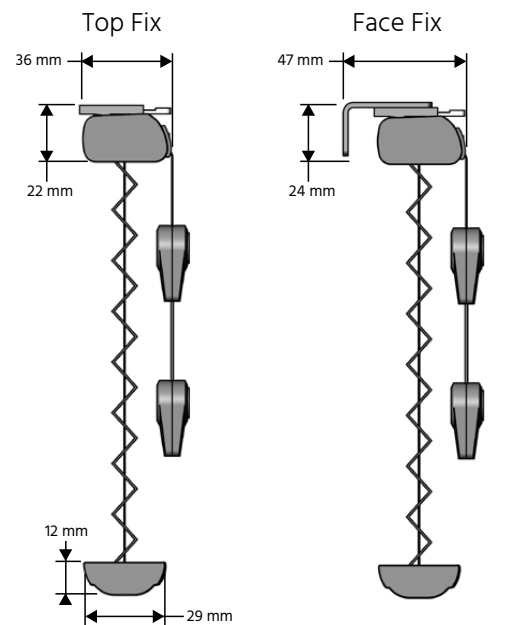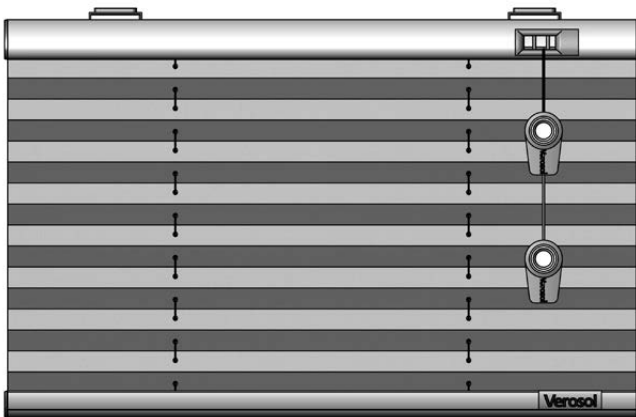


Guiding Channels




Screw Top Fix



Screw Face Fix



Tape Top Fix

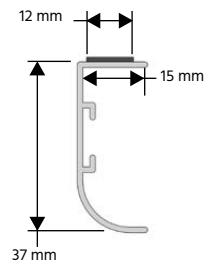

Tape Face Fix

# Standard P70

## Technical information

<b>Product Code</b>	P70.0	P70.1	
<b>Product Name</b>	Standard Pleat	Standard Pleat	
<b>Operation</b>	Cord Operation	Profile Operation	
<b>Dimensions</b>	Width*	300mm min - 2900mm max*	300mm min - 1000mm max
	Drop	200mm min - 3600mm max	400mm min - 2000mm max
	Cord lock	2900mm maximum width	N/A
	Maximum area	10m <sup>2</sup>	2m <sup>2</sup>
<b>Head Rail</b>	Material	Extruded Aluminium Alloy - Asymmetric Profile	
	Dimensions	33mm W x 20mm H	
<b>Bottom Rail</b>	Material	Extruded Aluminium Alloy - Symmetric Profile	
	Dimensions	30mm W x 12mm H	
	Colours	RAL 1001, 1019, 7016, 8025, 9001, 9004, 9010, aluminium anodized	
<b>Inner Rail</b>	Material	UV Stabilised Acrylonitrile Butadiene Styrene [ABS] Plastic	
	Paint	Electrostatic Powder Coated and Baked	
<b>End Caps</b>	Material	UV Stabilised Polymer Acrylic	
	Colours	Coordinated - Refer to "Pleated Rail Chart"	
<b>Lift and Blind Cords</b>	Material	Braided Polyester [minimum diameter: 2.2mm]	
	Colours	Grey, Black, Sandy Beige, White	
<b>Control Lock</b>	Material	ULTEM / PPS-Fortran	
	Type	Front Mounted	
<b>Cord Position</b>	Colour	Grey with coordinated colour cap	
	Material	Electro Plated Steel	
<b>Installation Brackets</b>	Operation	Top or Face Fixing - concealed when installed	

## Optional

<b>Guide Wire</b>	Angle	Up to 15° angle from vertical
	Maximum Width	1500mm
	Maximum Area	4.8m <sup>2</sup>
	Cable	Polyester cable with Kevlar, 20mm from edge
<b>Bottom Installation Bracket</b>	Material	Stainless Steel
	Material	Extruded Aluminium Alloy U profile
<b>Guiding Channels</b>	Colours	RAL 1001, 1019, 7016, 8025, 9001, 9004, 9010, aluminium anodized
	Dimensions	15mm W x 37mm H

\* When the maximum fabric segment width of 2200mm is exceeded, blinds will have three equal segments with two overlaps in the blind. The maximum width of VeroCell fabric is 3000mm, the maximum drop of VeroCell fabric is 2700mm.

